

Attention Installer




DO NOT OVERTIGHTEN

the ball valve swivel nut.

It is recommended to first hand tighten the swivel nut, and then further tighten the nut by a quarter to a third of a turn with a spanner.

This has been found to provide a suitably tight seal, without deforming or compromising the rubber washer.

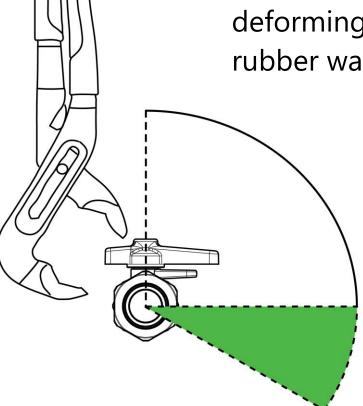

90 – 120 deg past hand tight